
SF1000 Parade Bin

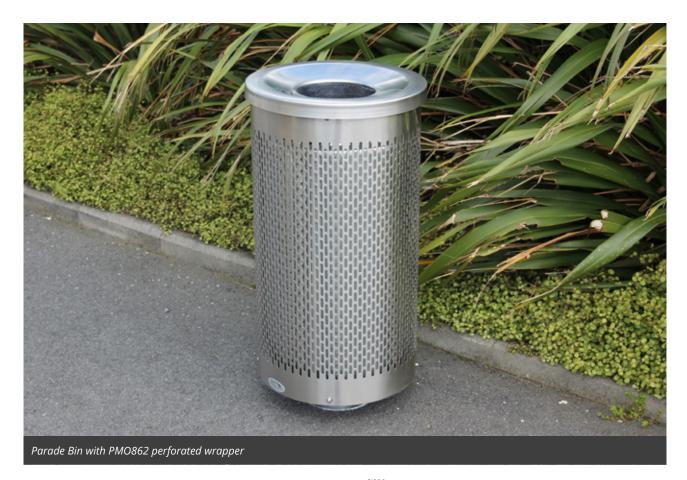

PRODUCT FEATURES

- High strength fabricated steel construction
- All fixings: Stainless Steel 316
- Supplied fully assembled
- · Galvanised Steel liner with handles
- · Finished in any standard powder coat colour

DIMENSIONS

- Standard Metal Body: Height 915mm, width 458mm
- Hardwood Timber Batten Body: Height 915mm, width 487mm
- · Capacity 82L

BODY SPECIFICATIONS

Body

- □ Hardwood Timber Battens
- ☐ Perforated Material (see next page)
- □ Custom (see next page)

Concave Lid


- Spun 3.0mm Aluminium or optional 1.5mm Stainless Steel.
- Ø195mm opening for litter
- Fitted with Southco lock
- □ No Lid
- □ Aluminium
- □ Aluminium with ash tray
- □ Stainless Steel
- ☐ Stainless Steel with ash tray

Base

- Mild Steel
- Hot Dip Galvanised

Fixing

Surface Mount or Extended Leg

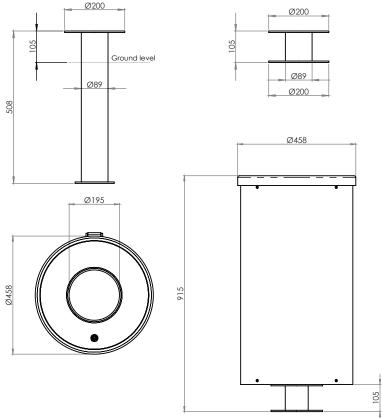




SF1000 Parade Bin

Standard Perforated Options



















Custom Options









Customise your own design or logo. Contact us to find out more about our perforated and laser cut customisation options.









SF1000 Parade Bin

Care & Maintenance Suggestions

Our products are constructed using a variety of different materials, all of which are highly corrosion resistant. Despite this, some care is required to maintain their good looks. The extent to which cleaning is required will depend on a number of factors including environmental conditions, construction activity and level of use.

MAINTAINING THE METAL SURFACES

To maintain the original appearance of the metal, it should be cleaned regularly using warm soapy water.

Stainless Steel: Rust spots or 'tea stains' can occur on the surface of the material which are normally caused by contamination from ordinary mild steel, particularily in areas where construction work has been undertaken. Such stains can be removed with careful use of an abrasive pad, being mindful of the direction of the grain.

Galvanised Steel: If the galvanised coating is significantly penetrated, a zinc rich primer should be applied to the damaged area to maintain its corrosion resistance.

MAINTAINING THE PAINTED OR POWDER COATED SURFACES

Clean regularily with warm soapy water. Should the paint become chipped or scratched, it can be touched up using an acrylic based paint.

MAINTAINING THE TIMBER

Dirt can be removed using mild detergents. If the timber is left untreated, over time it will gradually change to a silvery grey colour. The timber will remain structurally sound without further maintenance.

LINER

The bin is equipped with a heavy duty galvanized steel liner. To prolong the life of the liner Tilley recommends using plastic bin liners. This will also prevent seepage of liquids onto the surrounding pavement.

LOCKS, HINGES AND OTHER MOVING PARTS

All moving parts should be kept clean and lubricated to ensure a long life. A spray lubricant such as 'WD40' is widely available and well suited.



AUCKLAND