Safety Bollard SF3012



PRODUCT FEATURES

- High Strength fabricated steel construction
- All fixings: Stainless Steel 316
- Supplied fully assembled
- Hot Dip Galvanised AS/NZS 4680:2006

DIMENSIONS

 Height (above ground) 900mm (excludes cap) Diameter 115mm

BODY SPECIFICATIONS

Body

· Mild Steel Pipe with 4.5mm wall thickness

Base Plate

- · 8.0mm Mild Steel
- Hot Dip Galvanised Ground tube socket for removable Type A

Head


Galvanised Round Cap

Visibility

- · Choice of hazard awareness colour
- $\cdot \ \square$ Optional reflective strip

Mounting

- □ Fixed Surface Mount
- □ Fixed Below Ground
- □ Fixed Extended Leg
- □ Removable Type A

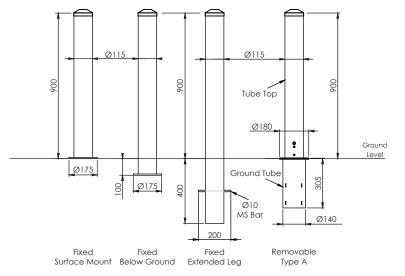



Safety Bollard SF3012

Care & Maintenance Suggestions

Our products are constructed using a variety of different materials, all of which are highly corrosion resistant. Despite this, some care is required to maintain their good looks. The extent to which cleaning is required will depend on a number of factors including environmental conditions, construction activity and level of use.

MAINTAINING THE METAL SURFACES

To maintain the original appearance of the metal, it should be cleaned regularly using warm soapy water.

Galvanised Steel: If the galvanised coating is significantly penetrated, a zinc rich primer should be applied to the damaged area to maintain its corrosion resistance.

MAINTAINING THE PAINTED OR POWDER COATED SURFACES

Clean regularily with warm soapy water. Should the paint become chipped or scratched, it can be touched up using an acrylic based paint.







DOC 1090/1